

BV-111	閥盤：球墨鑄鐵
BV-112	Disc:(FCD45)
BV-113	閥盤：不銹鋼
BV-114	Disc:(CF8)

鑄鐵對夾式蝶閥

CAST IRON BUTTERFLY VALVE (WAFER)

Wafer type body, Renewable seat, Center driver disc.

FIG. BV-111 & BV-113 把手式(Lever type)

FIG. BV-112 & BV-114 齒輪式(Gear type)

Flanges: JIS 10K

ANSI class125 (B16.1).class150 (B16.5)

PN10 PN16

FACE TO FACE:ISO 5752

MOUNTING PAD:ISO 5211 TABLE 5.

TEST INSPECTION:ISO 5208 API-598

最高使用壓力 WORKING PRESSURE	試驗壓力(水壓) TEST PRESSURE(Water)	
80°C 以下之靜流水	閥體 BODY	閥座 SEAT
11kg f/cm ²	22kg f/cm ²	16kg f/cm ²

零件	PART	材質 MATERIAL	可承制材質 ORDER MATERIAL
閥體	BODY	CAST IRON (FC25)	FCD45
閥座	SEAT	NBR (80°C)/EPDM(120°C)	VITON
擋流盤	BV-111 BV-112 DISC	DUCTILE IRON (FCD45)	CF8M/BRONZE
	BV-113 BV-114 DISC	STAINLESS STEEL (CF8)	
閥杆	STEM	STAINLESS STEEL (SUS410)	SUS304/SUS316
油封/墊圈	O-RING	EPDM+STEEL/EPDM	PTFE
定位盤	PLATE	STEEL (SS41)	PC/SUS304
把手	LEVER	DUCTILE IRON (FCD45)	PC/CF8/SS41
齒輪操作器	GEAR BOX	CAST IRON (FC20)	CF8/FCD45
手輪	HANDLE	CAST IRON (FC20)	CF8/FCD45



BV-111




BV-112



BV-113



BV-114

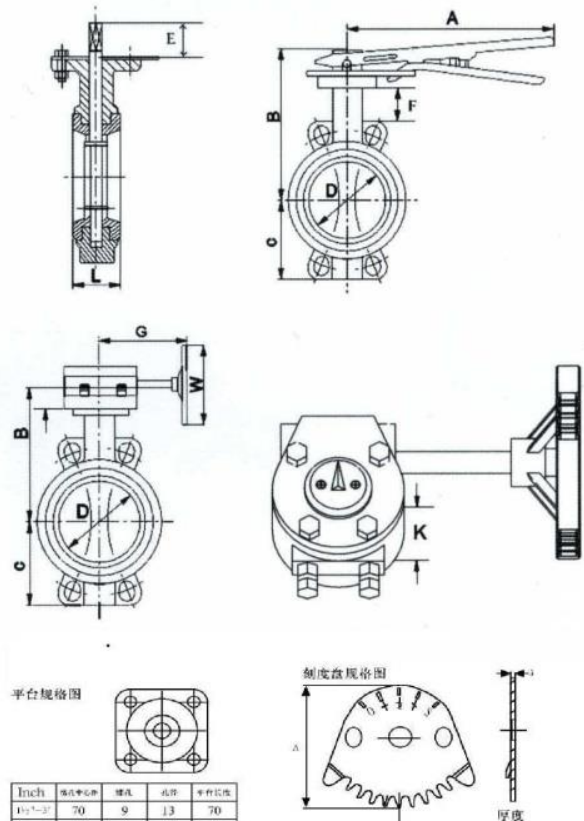

平台規格圖

Inch	標記中心距	螺孔	孔距	平台厚度
1 1/2"-3"	70	9	13	70
4"-6"	70	9	16	70
8"	102	12	19	96
10"	102	12	22	96
12"	102	12	28	96

刻度齒規帶圖

Inch	最大A	螺孔孔距	螺孔孔距	螺孔孔距	螺孔
1 1/2"-6"	106	11	16	70	18
8"-12"	137	12	18	102	30

尺寸 (mm)	1-1/2" DN40	2" DN50	2-1/2" DN65	3" DN80	4" DN100	5" DN125	6" DN150	8" DN200	10" DN250	12" DN300	14" DN350	16" DN400	18" DN450	20" DN500	24" DN600
A	200	200	200	200	250	250	250	345	345	345					
B	151	165	175	186	200	219	234	264	312	332	404	426	479	494	570
C	52	70	79	85	102	113	131	163	204	238	286	319	347	377	436
D	41	57	70	82	104	126	151	198	246	296	335	392	438	492	592
L	33	43	46	46	52	56	56	61	68	78	78	102	114	127	154
E	32	32	32	32	32	32	32	34	34	34	55	55	55	90	90
F	50	52	52	47	46	52	50	45	55	40	56	50	75	48	58
W	140	140	140	140	140	140	140	240	240	240	350	350	350	410	410
G	180	180	180	180	180	180	180	230	230	230	250	250	250	350	350
K	62	62	62	62	62	62	62	72	72	72	88	88	88	108	108
扭力矩 NM	16.6	21	22	29	33	50	70	130	210	290	370	420	490	570	650