

BV-131 JIS-10K  
 BV-132 JIS-10K  
 BV-135 JIS-16K  
 BV-136 JIS-16K

# 不銹鋼對夾式蝶閥

# STAINLESS STEEL BUTTERFLY VALVE (WAFER)

Wafer type body, Renewable seat, Center driver disc.

FIG. BV-131 & BV-135 把手式(Lever type)  
 FIG. BV-132 & BV-136 齒輪式(Gear type)

Flanges: JIS 10K JI16K

另可承制 ANSI class125 (B16.1), class150 (B16.5)  
 PN10 PN16



FACE TO FACE: ISO 5752

MOUNTING PAD: ISO 5211 TABLE 5.

TEST INSPECTION: ISO 5208 API-598

零件	PART	材質 MATERIAL	可承制材質 ORDER MATERIAL
閥體	BODY	STAINLESS STEEL (CF8)	CF8M/WCB
閥座	SEAT	NBR (80°C)/EPDM(120°C)	VITON
擋流盤	DISC	STAINLESS STEEL (CF8)	CF8M/BRONZE
閥杆	STEM	STAINLESS STEEL (SUS410)	SUS304/SUS316
油封	O-RING	EPDM+STEEL	
定位盤	PLATE	STAINLESS STEEL (SUS304)	PC/SS41
把手	LEVER	STAINLESS STEEL (SUS304)	PC/FCD45
齒輪操作器	GEAR BOX	STAINLESS STEEL (SUS304)	CAST IRON(FC20)
手輪	HANDLE	STAINLESS STEEL (SUS304)	CAST IRON(FC20)

最高使用壓力 WORKING PRESSURE		試驗壓力(水壓) TEST PRESSURE(Water)			
80°C 以下之靜流水		閥體 BODY		閥座 SEAT	
10K	16K	10K	16K	10K	16K
11kg f/cm <sup>2</sup>	17kg f/cm <sup>2</sup>	22kg f/cm <sup>2</sup>	32kg f/cm <sup>2</sup>	16kg f/cm <sup>2</sup>	24kg f/cm <sup>2</sup>

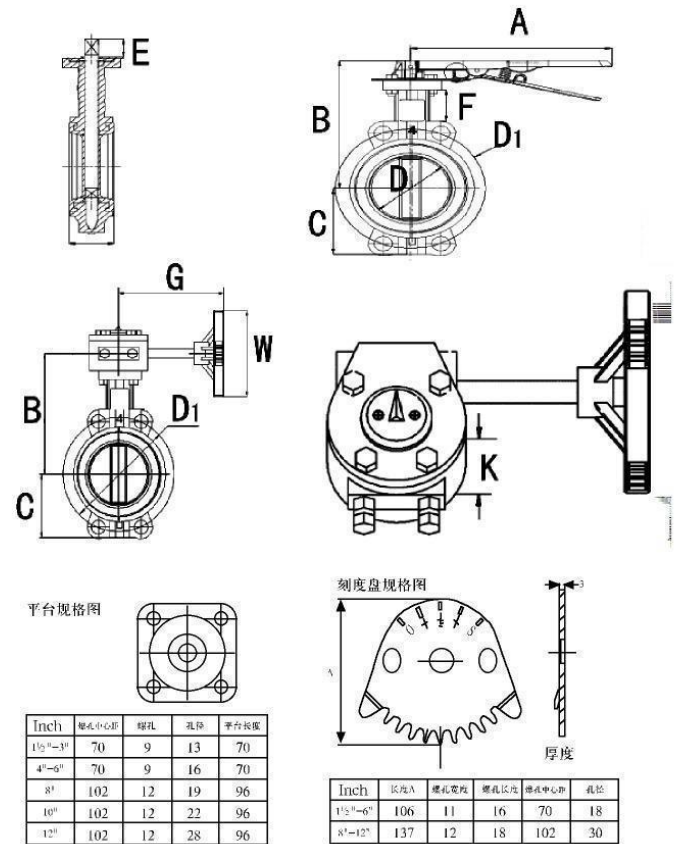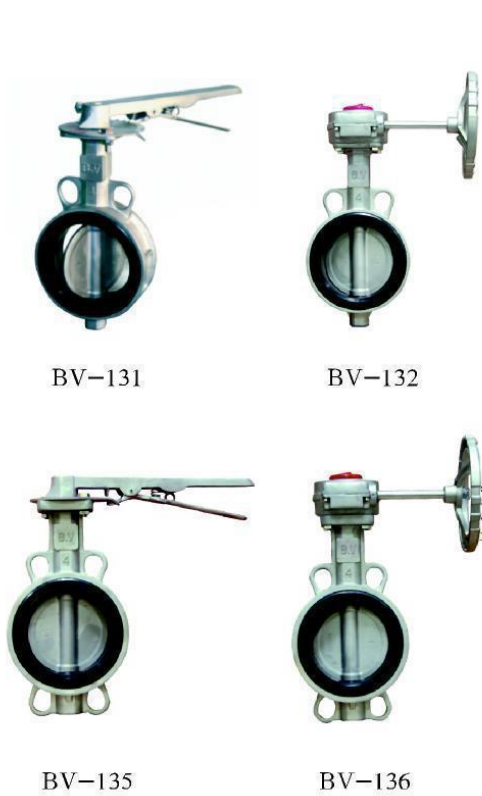

尺寸 (mm)	2" DN50	2-1/2" DN65	3" DN80	4" DN100	5" DN125	6" DN150	8" DN200	10" DN250	12" DN300	14" DN350	16" DN400	18" DN450	20" DN500	24" DN600
A	185	185	185	235	235	235	350	350	350					
B	162	175	187	199	218	229	264	311	335	400	425	472	494	569
C	10K	65	72	72	94	102	115	149	182	208	283	313	346	431
	16K	50	70	77	85	104	115	132	162	202	269	310	343	426
D	57	70	82	104	126	151	198	246	296	335	392	438	492	592
D1	95	114	128	148	175	200	263	322	375	429	479	534	590	690
L	43	46	46	52	56	56	61	68	78	78	102	114	127	154
E	32	32	32	32	32	32	34	34	34	55	55	55	90	90
F	10K	50	46	50	50	55	64	59	53	63	54	65	63	72
	16K	46	50	50	49	52	53	47	55	52	59	57	67	46
W	150	150	150	150	150	150	240	240	240	350	350	350	350	350
G	165	165	165	165	165	165	185	185	185	250	250	250	310	310
K	54	54	54	54	54	54	66	66	66	88	88	88	105	105